


Terminals : male FASTON (.250 series / 6,3x0,8 mm)

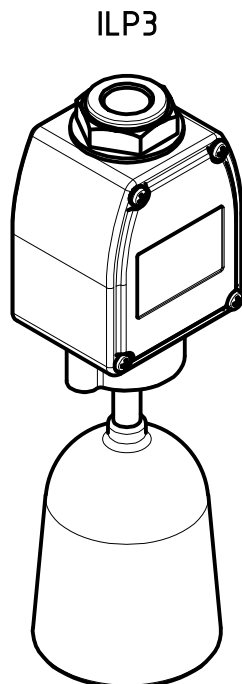

Model	ILP3		
Weight	0,8 [kg]		
Power supply	not powered		
Signal	SPDT / max. 10[A]-250VAC		
IP grade	IP65		
Housing	Aluminium (powder coated)		
Connection	G 3/4 - Aluminium		
Pendulum	Polyamide		
Ambient temperature	-20 < Ta < +70 [°C]		
Process temperature	-20 < Tp < +70 [°C]		
Directives	2011/65/EU (RoHS) 2014/34/EU (ATEX) 2014/35/EU (LVD)		
Ex Marking	Ex II 1 D T85°C IP65		
<b>© CAMLogic</b> Via dell'Industria 12 42025 Cavriago (RE) - ITALY www.camlogic.it		DRAWING N.	SHEET:
		0602_0016_00	1 OF 1
GENERAL TOL.: ISO 2768-mH	UNLESS OTHERWISE SPECIFIED DIMENSION ARE IN [mm]	DRAWING FROM CAD SYSTEM - REFER TO 3D MODEL FOR MISSING DIMENSION - NO MANUAL MODIFICATION ALLOWED	REV: 0
		SCALE: 1:2	DRAWN NR DATE 28.10.2021